



JAMAICA MILLENNIUM MOTORING CLUB

Section 6

Vehicle Requirements for Speed Events

Amendment 2005 – 002

Date: March 5, 2005

With immediate effect.

In regard to Article 6.1.3 I ii) and Article 6.1. 4 a) of Section 6 (Vehicle Requirements for Speed Events) of the Rules & Regulations of the JMMC.

Remove the wording “**Tyres are restricted to D.O.T or TUV approved only.**”

Add the following:

All Tyres must be molded.

Tyres are restricted to:

- a) **D.O.T. (United States Department of Transportation), JIS (Japan Industrial Standards) or ISO (International Organization for Standardization) approved.**
- b) **Competition tyres, the surface of which at the start of the event be taken up by grooves at least 1.6mm deep, with a maximum angle of 60° between the blocks in section (see diagram t-1) and 2mm wide and must occupy at least 10% of the total surface.**

Surface, or tread pattern, is defined as per the following table.


	Length x Width	Surface	10% rate
9”	170 x 140	23800	2380
8.5”	161 x 140	22540	2254
8”	148 x 140	20720	2072

7.5"	142 x 140	19880	1988
7"	133 x 140	18620	1862
6.5"	124 x 140	17360	1736

Length and Width dimensions are in millimeters (mm).
Surface and 10% rate dimensions are in mm².

The tread pattern must be molded.

Tyre cutting is authorized.

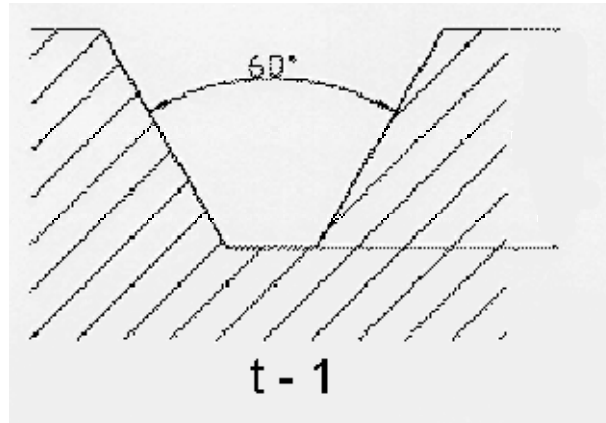

By authority of
Competition Sub-Committee
Jamaica Millennium Motoring Club